

C03-1 24V TPW Fan Workshop


HT32F65C33F (<18W)



Characteristics

- HT32F65C33F all-in-one MCU integrated 32V Driver, 5V LDO and FG signal output
- 1-shunt FOC Sensorless control for low noise and high-efficiency
- Supports on-fly and zero-failure start-up strategy to enhance start-up stability
- Graphical interface: Guided parameter setting to accelerate development process
- Real-time monitoring platform for real-time parameter adjustment and waveform observation

Block Diagram

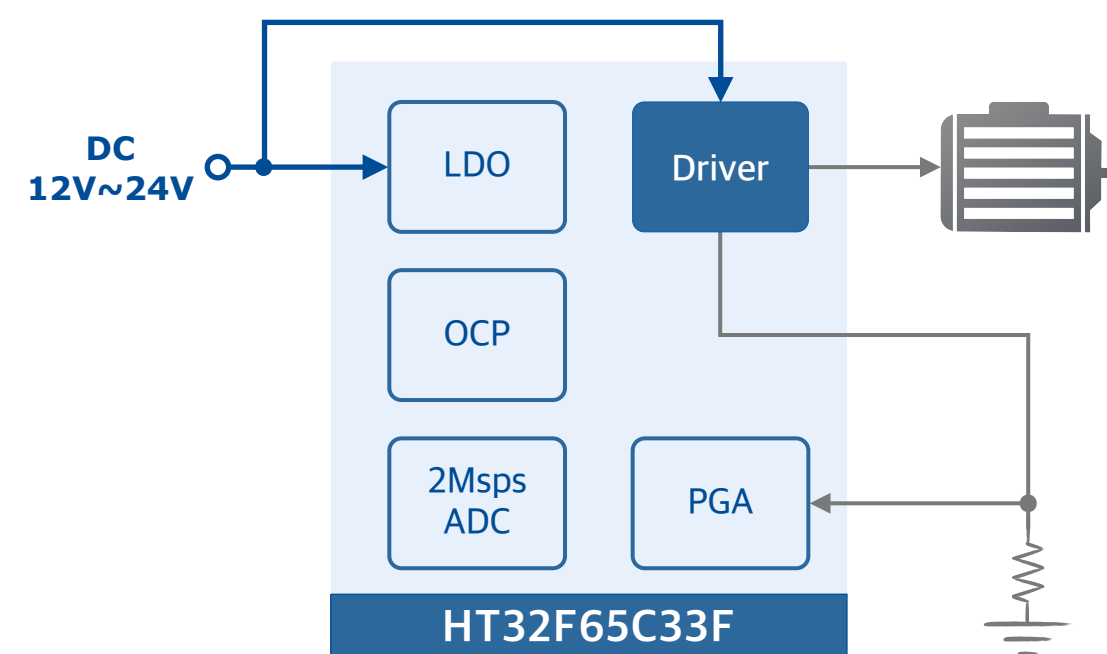

Applications

Table fans, pedestal fans, wall fans, other fans, etc.

